

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
27 May 2004 (27.05.2004)

PCT

(10) International Publication Number  
**WO 2004/044425 A1**

(51) International Patent Classification<sup>7</sup>: **F04B 43/12**

(74) Agents: **DABRINGHAUS, Walter et al.**; Rosa-Luxemburg-Strasse 18, 44141 Dortmund (DE).

(21) International Application Number:  
PCT/EP2003/012214

(22) International Filing Date:  
3 November 2003 (03.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
202 17 483.2 13 November 2002 (13.11.2002) DE

(71) Applicant (for all designated States except US): **ECO-LAB INC.** [US/US]; 370 Wabasha Street N., St. Paul, MN 55102-1390 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HUBER, Wolfgang** [DE/DE]; Johannes-Weibhauser-Strasse 16, 83413 Friedolfing (DE). **RUTZ, Klaus** [DE/DE]; Siegsdorferstrasse 15, 83377 Vachendorf (DE). **HEIDUCZEK, Ralf** [DE/DE]; Klausweg 2a, 83483 Bischofswiesen (DE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: PERISTALTIC PUMP

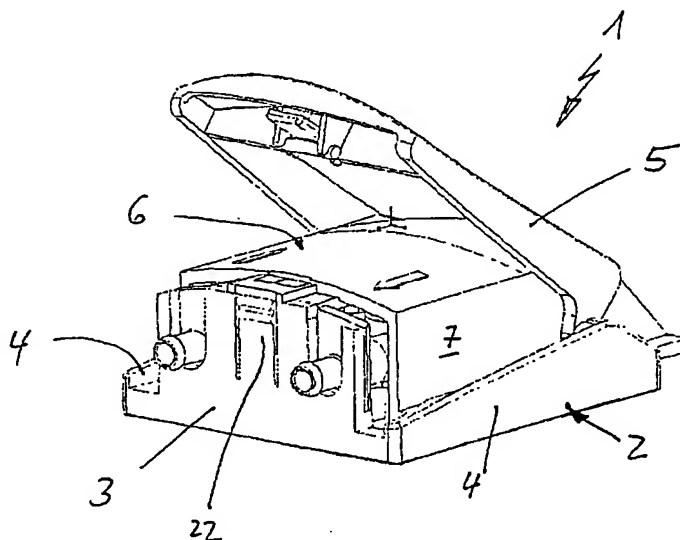

(57) Abstract: A peristaltic pump (1) with a rotating squeeze roller carrier (12), a squeeze hose (14) partly looping around the squeeze rollers (13) and a curved contact wall (19) for the squeeze hose (14), the contact wall (19) being opposite to the effective surface of the squeeze rollers, whereby the contact wall (19) is movable by way of a setting lever (5) from a setting (Fig. 5), which enables fitting with the squeeze hose (14), to a work setting (Fig. 6), pressing the squeeze hose (14) against the squeeze rollers (13) and whereby the contact wall (19) forms a part of a pump housing cover (6) at which the setting lever (5) is positioned to be outwardly pivotable for displacement of the cover (6).